


# Normalized September/October 2018 Bicycle Volumes

16 Hour (06:00-22:00) 2-Way Totals

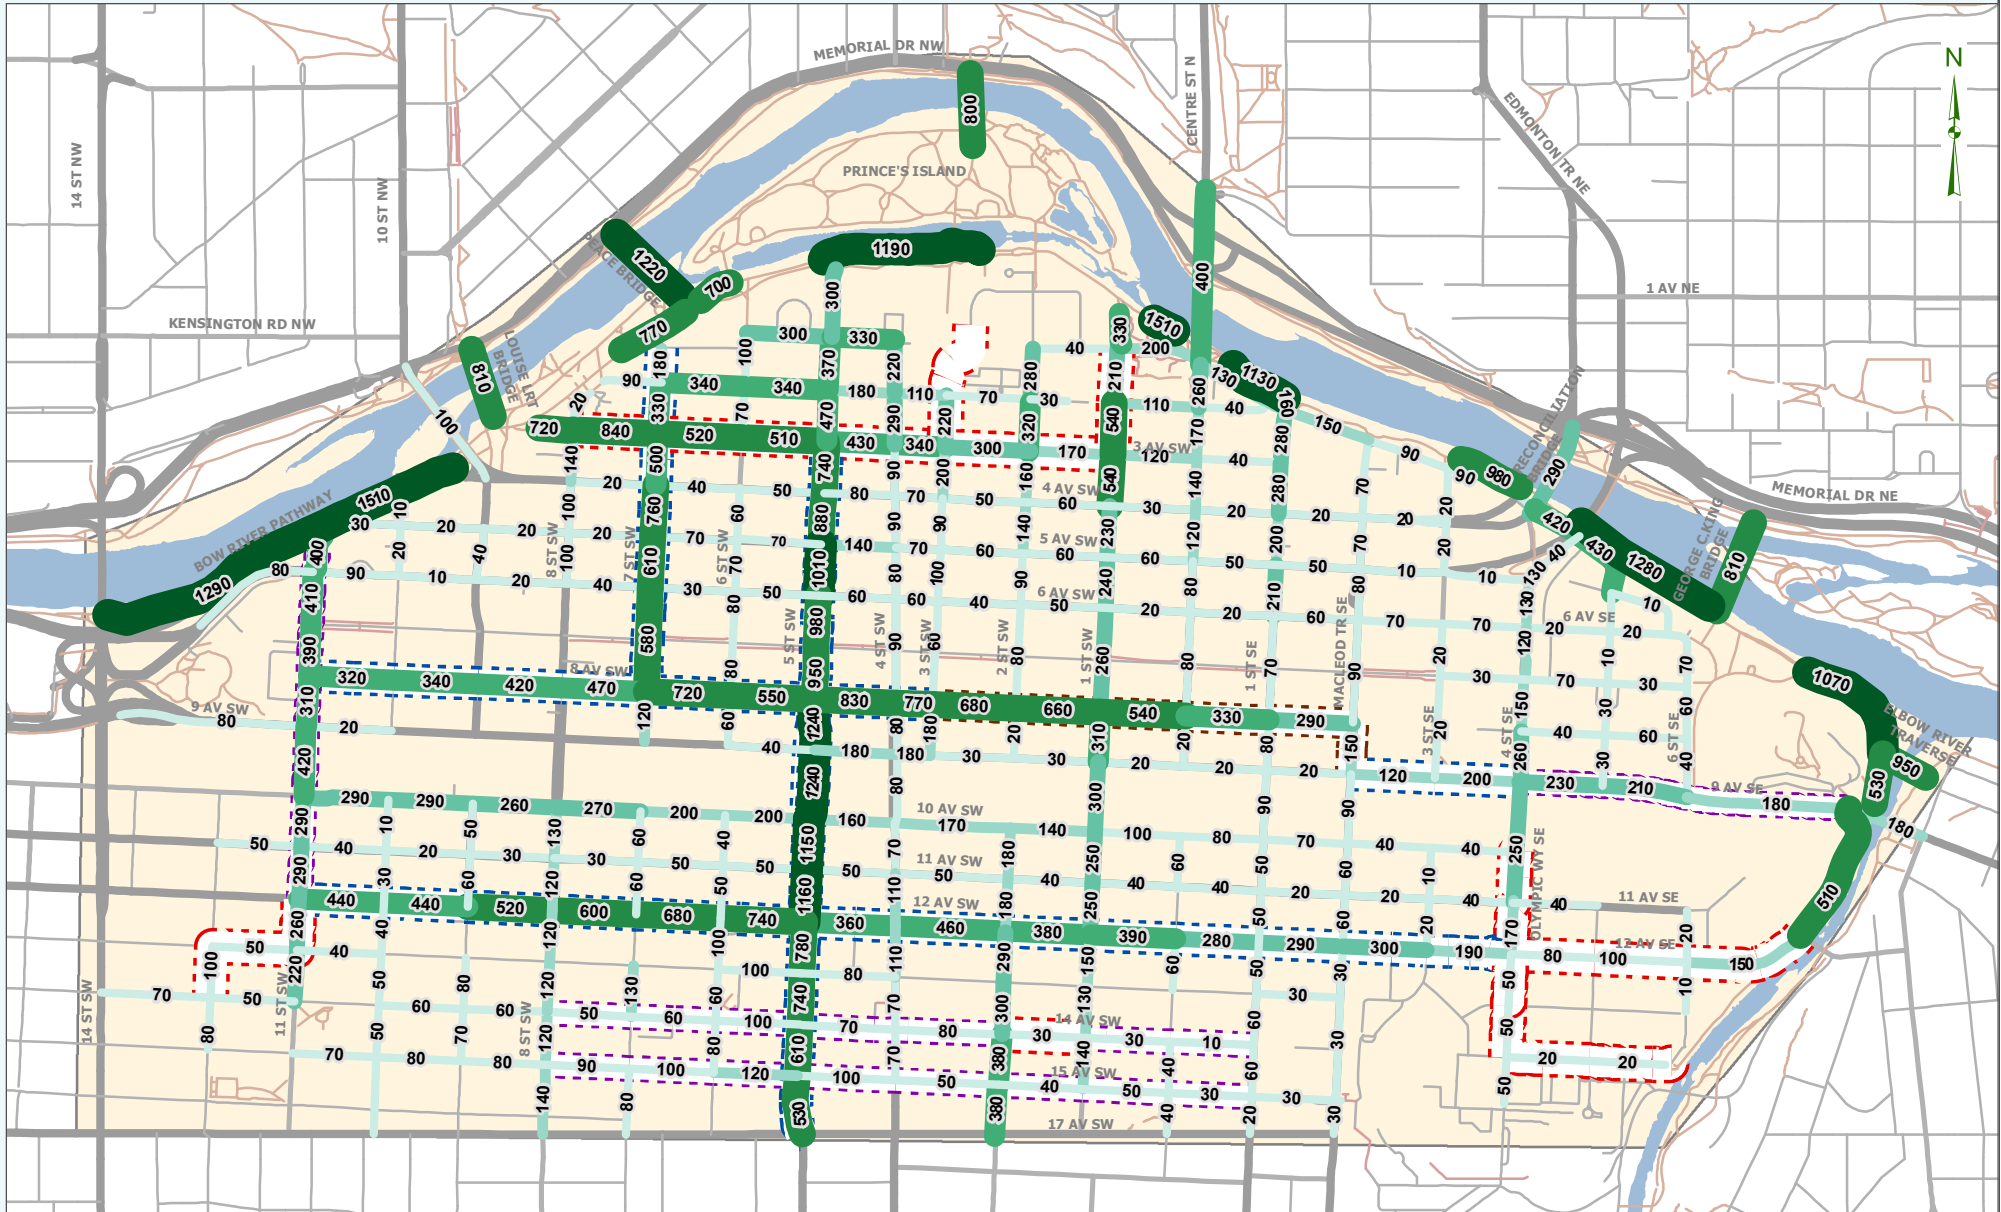

The data in this map are 2-way volumes collected on a single weekday in 2018, normalized to represent average September/October volume. Factors were calculated based on 12 automated count stations. The data came from a variety of sources including:

- 6 hour bike turning movements by Miovision camera & data collectors
- 16 hour screenlines (cordon counts)
- 24 hour bike pathway
- Multiple days roadway by portable eco-counter hose
- Permanent eco-counter station

6 hour counts were factored by average 1.7 to estimate 16 hour volumes using automated counter data & 24h counts.

Only segments, within the map boundary, where 2018 data was available, are depicted on this map.

Major constructions in September & October 2018:


- 4 St SW underpass between 8 Av and 10 Av SW enhancement project
- Bow river pathway closures/detour - West of Peace bridge, Riverfront Av and Reconciliation Bridge
- 17 Av SW upgrade construction

Total precipitation in September 2018 was 37mm, and 48mm in October 2018.

The City of Calgary provides this information in good faith but provides no warranty, nor accepts any liability arising from any incorrect, incomplete or misleading information or its improper use. If you have questions, require clarification or would like more details on this data please call 311.

Copyright © 2019 The City of Calgary. All rights reserved. Use subject to license.

## Normalized 16H Volumes Infrastructure Type

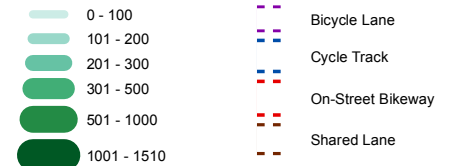

Metres

Date: Feb-14-2019

